


- ① WOOD POST; 6"x6" LUMBER MIN.
- ② #4 CU WIRE CONTINUOUS
- ③ 8' GROUND ROD (2 REQ'D)
- ④ 100A OR 200A SUB PANEL OR POLE MTD.
S.E.S. 120/240V
- ⑤ FINISH GRADE
- ⑥ UTILITY COMPANY SUPPLY; SEE UTILITY COMPANY
SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS

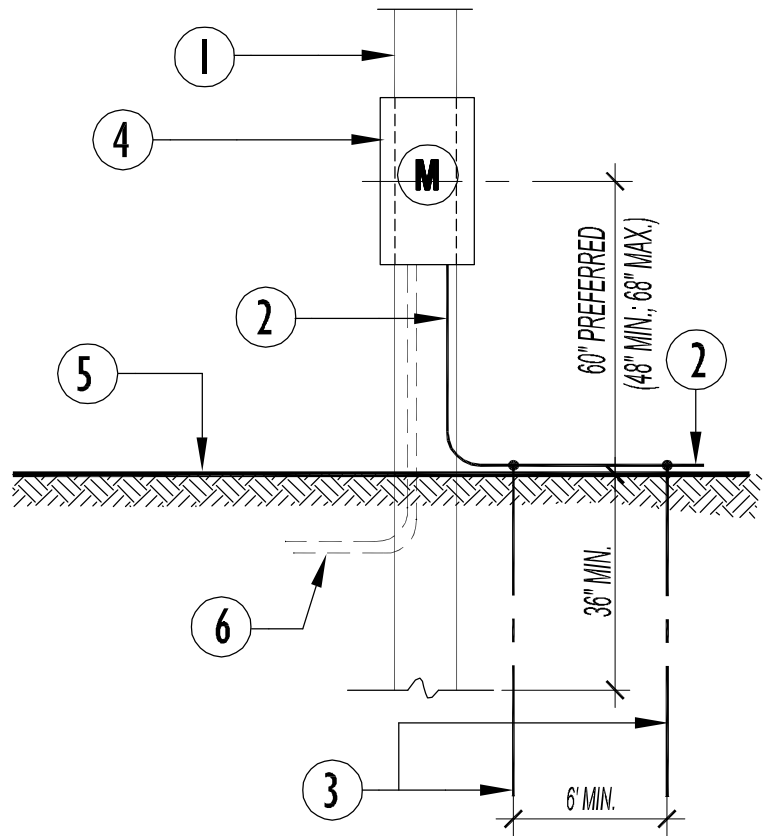

NOTE:
PROVIDE BARRIER POST IF
NEAR ON-SITE TRAFFIC

SCALE: NTS

TOWN OF GILBERT
90 E. CIVIC CENTER DR.
DEVELOPMENT SERVICES
DEPARTMENT

TEMPORARY POWER POLE - UNDERGROUND INSTALLATION

TOG/007
01-11